


PURE-C

Ceiling Mounted Spotlight
Integrated LED Driver
No Visible Screw




PURE Art-C – Ceiling Mounted Spotlight



Quick Info

- CITIZEN LED: 15W, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 18°, 24°, 36°, 50°
- Lumen Output: Up to 1000lm System Luminous Flux
- IP Class: IP20
- LED Driver: On-Off, Phase Dim

Light Distribution

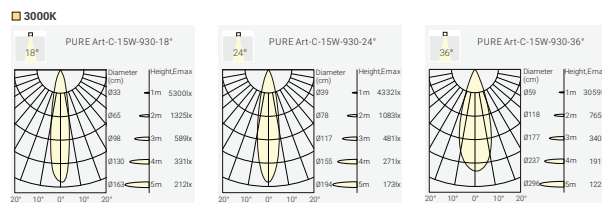

Finish



Order Info (PURE Art-C in White Housing & Black Reflector as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
13W	15W	36V	350mA	90	2700K	18°	850lm	900lm	PUAC-9271815F-WB
						24°	1100lm	900lm	PUAC-9272415F-WB
						36°	1100lm	900lm	PUAC-9273615F-WB
						50°	1100lm	900lm	PUAC-9275015F-WB
					3000K	18°	1200lm	950lm	PUAC-9301815F-WB
						24°	1200lm	950lm	PUAC-9302415F-WB
						36°	1200lm	950lm	PUAC-9303615F-WB
						50°	1200lm	950lm	PUAC-9305015F-WB
					4000K	18°	1300lm	1000lm	PUAC-9401815F-WB
						24°	1300lm	1000lm	PUAC-9402415F-WB
						36°	1300lm	1000lm	PUAC-9403615F-WB
						50°	1300lm	1000lm	PUAC-9405015F-WB

Code Remark: F=F(ON-OFF) P=P(Phase Dim)

Coding


Model	CRI/ CCT	Beam Angle	Power	Control	Finish	Reflector Color	Accessory
PUAC	927	18°	15	F	W	B	H
PURE Art-C	CR190/ 2700K	18°	15W	On-Off	White	Black	Honeycomb
	930	24°		P	B		
	CR190/3000K	24°		Phase Dim	Black		
	940	36°					
	CR190/ 4000K	36°					
	50						
	50°						

Optional accessory



Code for PUAC-9302511F-WB with Honeycomb
PUAC-9302511F-WB-H


PURE S-C – Ceiling Mounted Spotlight



Quick Info

- CITIZEN LED: 15W, 21W, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 15°, 25°, 30°, 50°
- Lumen Output: Up to 1700lm System Luminous Flux
- IP Class: IP20
- LED Driver: On-Off, Phase Dim, DALI Dim

Light Distribution

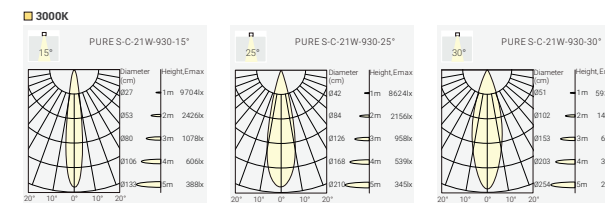

Finish



Order Info (PURE S-C in White Housing & Black Reflector as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
13W	15W	36V	250mA	90	2700K	15°	1400lm	1100lm	PUSC-9271509F-WB
						25°	1400lm	1100lm	PUSC-9272509F-WB
						30°	1400lm	1100lm	PUSC-9273009F-WB
						50°	1400lm	850lm	PUSC-9275009F-WB
					3000K	15°	1500lm	1200lm	PUSC-9301509F-WB
						25°	1500lm	1200lm	PUSC-9302509F-WB
						30°	1500lm	1200lm	PUSC-9303009F-WB
						50°	1500lm	900lm	PUSC-9305009F-WB
					4000K	15°	1600lm	1300lm	PUSC-9401509F-WB
						25°	1600lm	1300lm	PUSC-9402509F-WB
						30°	1600lm	1300lm	PUSC-9403009F-WB
						50°	1600lm	1000lm	PUSC-9405009F-WB
18W	21W	36V	500mA	90	2700K	15°	1900lm	1500lm	PUSC-9271513F-WB
						25°	1900lm	1500lm	PUSC-9272513F-WB
						30°	1900lm	1500lm	PUSC-9273013F-WB
						50°	1900lm	1100lm	PUSC-9275013F-WB
					3000K	15°	2000lm	1600lm	PUSC-9301513F-WB
						25°	2000lm	1600lm	PUSC-9302513F-WB
						30°	2000lm	1600lm	PUSC-9303013F-WB
						50°	2000lm	1200lm	PUSC-9305013F-WB
					4000K	15°	2100lm	1700lm	PUSC-9401513F-WB
						25°	2100lm	1700lm	PUSC-9402513F-WB
						30°	2100lm	1700lm	PUSC-9403013F-WB
						50°	2100lm	1300lm	PUSC-9405013F-WB

Code Remark: F=F(ON-OFF) P=P(Phase Dim) D=D(DALI Dim)

Optional accessory




Code for PUSC-9302515F-WB with Honeycomb
PUSC-9302515F-WB-H

Coding

Model	CRI/ CCT	Beam Angle	Power	Control	Finish	Reflector Color	Accessory
PUSC	927	15°	15	F	W	B	H
PURE S-C	CR190/ 2700K	15°	15W	On-Off	White	Black	Honeycomb
	930	25°	21	P	B		
	CR190/3000K	25°	21W	Phase Dim	Black		
	940	30°		D			
	CR190/ 4000K	30°		DALI Dim			
	50						
	50°						

PURE

LED Tracklight
Integrated LED Driver
Elegant Design

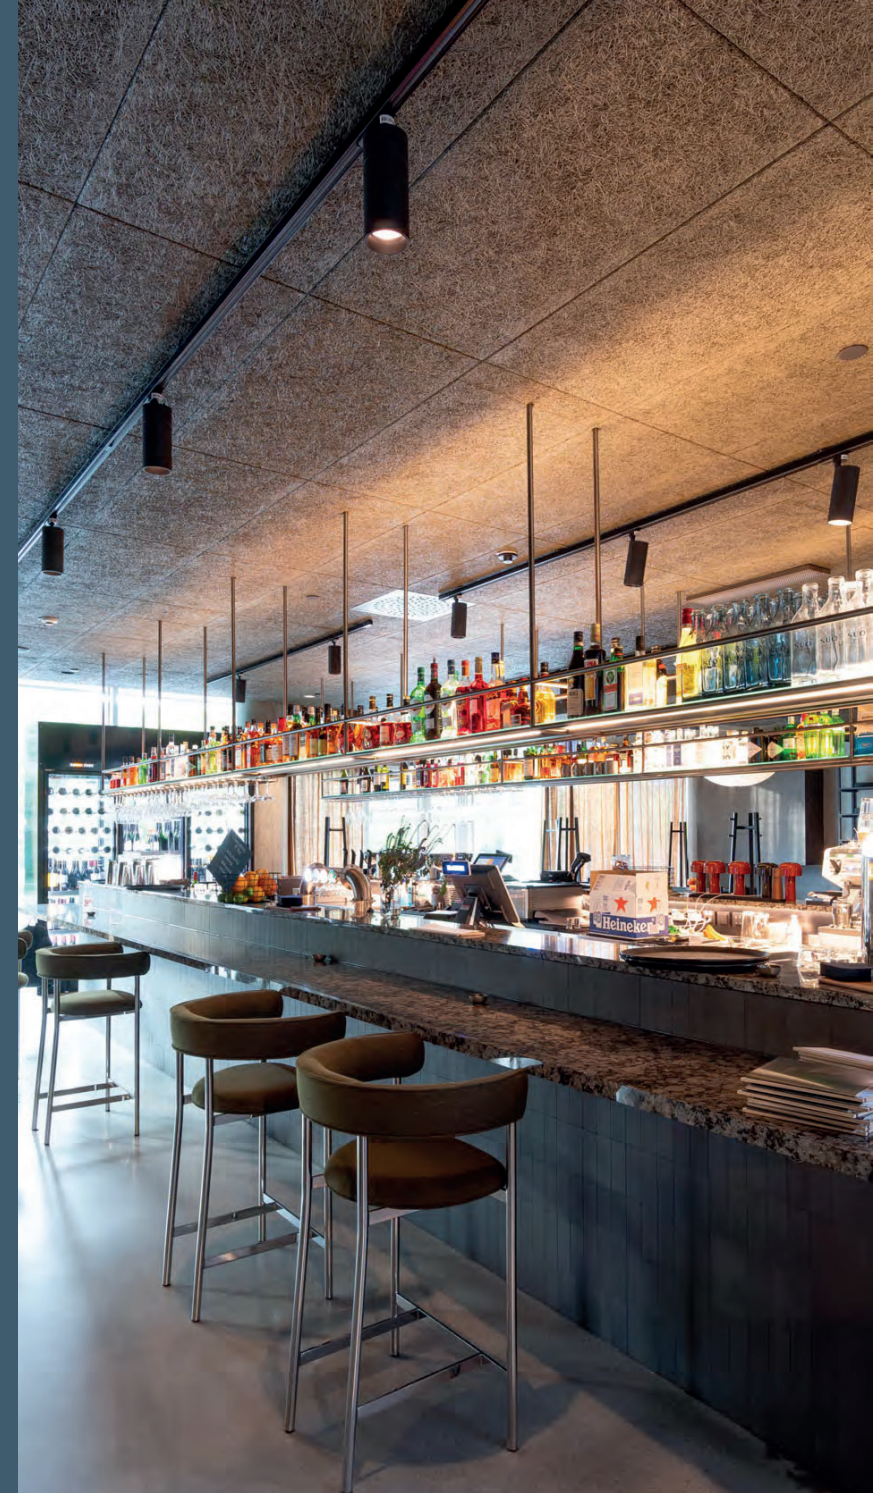

Project: VALO Hotel Helsinki, Finland

PURE – LED Tracklight

Project: HSG Perfumery Stuttgart Airport, Germany






Project : Peled Studios, Israel




Project: Maserati Showroom, Sofia, Bulgaria



Project: Sara Kulturhu, Norway

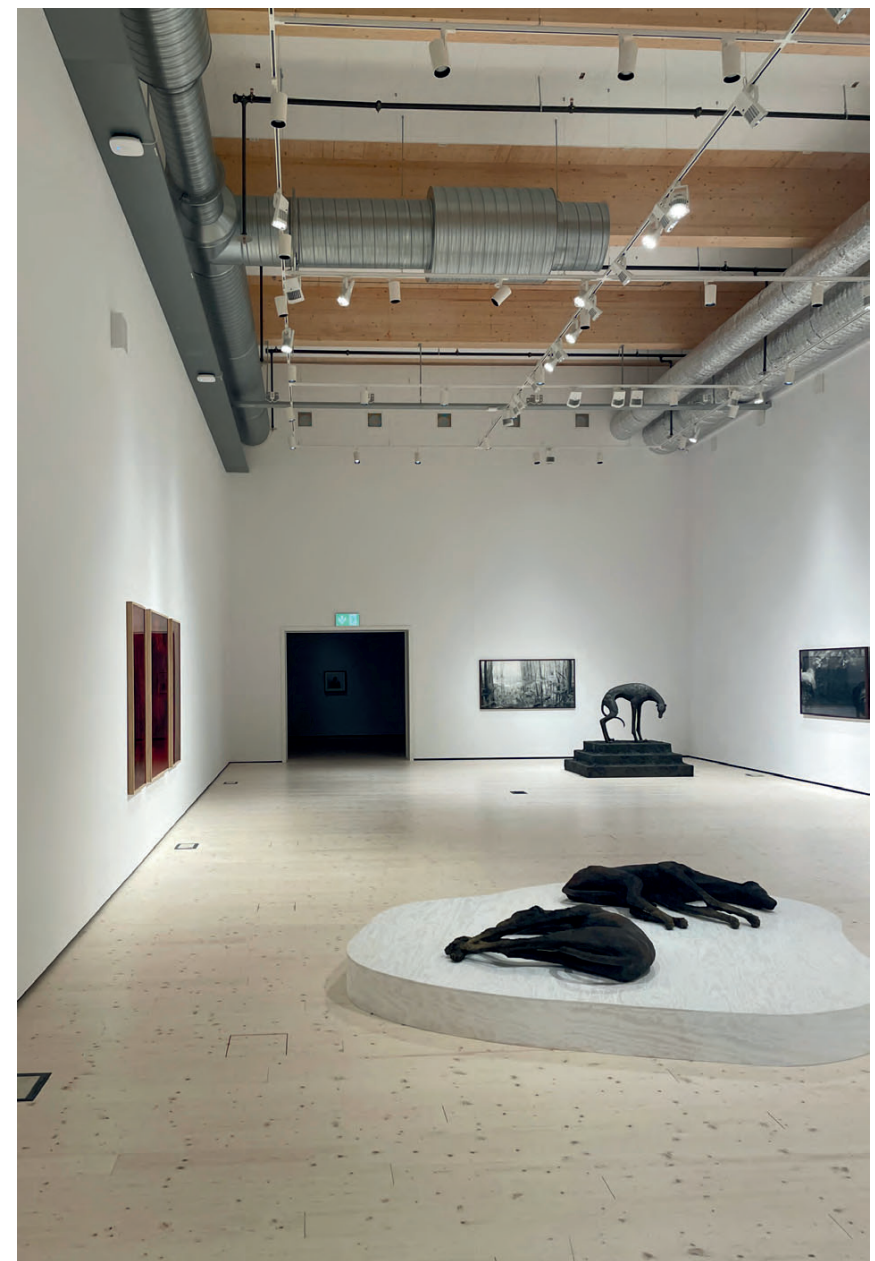


PURE Art – LED Tracklight



Quick Info

- CITIZEN LED: 11W, 15W, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 18°, 24°, 36°, 50°
- Lumen Output: Up to 1000lm System Luminous Flux
- IP Class: IP20
- LED Driver: On-Off, Phase Dim


Light Distribution

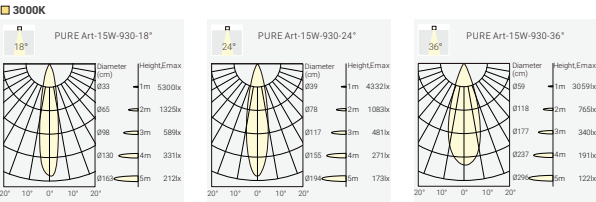


Finish



Optional accessory



Track System



Order Info (PURE Art in White Housing & Black Reflector as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
9W	11W	36V	250mA	90	2700K	18°	850lm	640lm	PUA2-9271811F-WB
						24°	850lm	640lm	PUA2-9272411F-WB
						36°	850lm	640lm	PUA2-9273611F-WB
						50°	850lm	640lm	PUA2-9275011F-WB
					3000K	18°	950lm	720lm	PUA2-9301811F-WB
						24°	950lm	720lm	PUA2-9302411F-WB
						36°	950lm	720lm	PUA2-9303611F-WB
						50°	950lm	720lm	PUA2-9305011F-WB
					4000K	18°	1050lm	800lm	PUA2-9401811F-WB
						24°	1050lm	800lm	PUA2-9402411F-WB
						36°	1050lm	800lm	PUA2-9403611F-WB
						50°	1050lm	800lm	PUA2-9405011F-WB

13W	15W	36V	350mA	90	2700K	18°	1100lm	900lm	PUA2-9271815F-WB
						24°	1100lm	900lm	PUA2-9272415F-WB
						36°	1100lm	900lm	PUA2-9273615F-WB
						50°	1100lm	900lm	PUA2-9275015F-WB
					3000K	18°	1200lm	950lm	PUA2-9301815F-WB
						24°	1200lm	950lm	PUA2-9302415F-WB
						36°	1200lm	950lm	PUA2-9303615F-WB
						50°	1200lm	950lm	PUA2-9305015F-WB
					4000K	18°	1300lm	1000lm	PUA2-9401815F-WB
						24°	1300lm	1000lm	PUA2-9402415F-WB
						36°	1300lm	1000lm	PUA2-9403615F-WB
						50°	1300lm	1000lm	PUA2-9405015F-WB

Code Remark: F=F(ON-OFF) P=P(Phase Dim)


Coding

Model	CRI/ CCT	Beam Angle	Power	Control	Finish	Reflector Color	Accessory
PUA2	927	18	11	F	W	B	H
PURE Art	CR190/ 2700K	18°	11W	On-Off	White	Black	Honeycomb
	930	24	15	P	B		
	CR190/3000K	24°	15W	Phase Dim	Black		
	940	36					
	CR190/ 4000K	36°					
		50					
		50°					

Project : Hotel MouCo, Portugal




PURE S – LED Tracklight



Quick Info

- CITIZEN LED: 15W, 21W, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 15°, 25°, 30°, 50°
- Lumen Output: Up to 1700lm System Luminous Flux
- IP Class: IP20
- LED Driver: On-Off, Phase Dim

Light Distribution

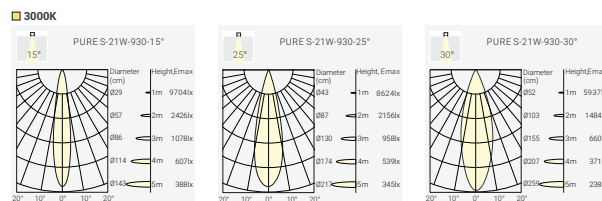

Finish



Optional accessory



Code for PUS1-9301515F-WB with Honeycomb
PUS1-9301515F-WB-H

Honeycomb

Track System



Compatible with GLOBAL / POWERGEAR
3-Circuit Track System

Order Info (PURE S in White Housing & Black Reflector as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
13W	15W	36V	250mA	90	2700K	15°	1400lm	1100lm	PUS1-9271515F-WB
						25°	1400lm	1100lm	PUS1-9272515F-WB
						30°	1400lm	1100lm	PUS1-9273015F-WB
						50°	1400lm	850lm	PUS1-9275015F-WB
					3000K	15°	1500lm	1200lm	PUS1-9301515F-WB
						25°	1500lm	1200lm	PUS1-9302515F-WB
						30°	1500lm	1200lm	PUS1-9303015F-WB
						50°	1500lm	900lm	PUS1-9305015F-WB
					4000K	15°	1600lm	1300lm	PUS1-9401515F-WB
						25°	1600lm	1300lm	PUS1-9402515F-WB
						30°	1600lm	1300lm	PUS1-9403015F-WB
						50°	1600lm	1000lm	PUS1-9405015F-WB

18W	21W	36V	500mA	90	2700K	15°	1100lm	1500lm	PUS2-9271521F-WB
						25°	1100lm	1500lm	PUS2-9272521F-WB
						30°	1100lm	1500lm	PUS2-9273021F-WB
						50°	1100lm	1100lm	PUS2-9275021F-WB
					3000K	15°	1200lm	1600lm	PUS2-9301521F-WB
						25°	1200lm	1600lm	PUS2-9302521F-WB
						30°	1200lm	1600lm	PUS2-9303021F-WB
						50°	1200lm	1200lm	PUS2-9305021F-WB
					4000K	15°	1300lm	1700lm	PUS2-9401521F-WB
						25°	1300lm	1700lm	PUS2-9402521F-WB
						30°	1300lm	1700lm	PUS2-9403021F-WB
						50°	1300lm	1300lm	PUS2-9405021F-WB

Code Remark: F=F(ON-OFF) P=P(Phase Dim)

Coding

PUS1	-	***	**	**	*	-	*	-	*
Model	CRI/ CCT	Beam Angle	Power	Control	Finish	Reflector Color	Accessory		
PUS1	927	15	15	F	W	B	H		
PURE S-15W	CR190/ 2700K	15°	15W	On-Off	White	Black	Honeycomb		
PUS2	930	24	21	P	B				
PURE S-21W	CR190/3000K	24°	21W	Phase Dim	Black				
	940	36							
	CR190/ 4000K	36°							
		50							
		50°							


PURE S – LED Tracklight



Quick Info

- CITIZEN LED: 15W, 21W, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 15°, 25°, 30°, 50°
- Lumen Output: Up to 1700lm System Luminous Flux
- IP Class: IP20
- LED Driver: DALI Dim

Light Distribution

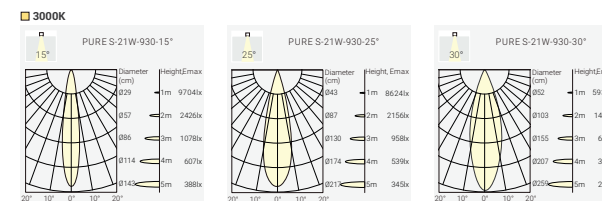

Finish



Optional accessory



Code for PUS1-9301515D-WB with Honeycomb
PUS1-9301515D-WB-H

Honeycomb

Track System



Compatible with GLOBAL 3-Circuit
Track System

Order Info (PURE S in White Housing & Black Reflector as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
13W	15W	36V	250mA	90	2700K	15°	1400lm	1100lm	PUS1-9271515D-WB
						25°	1400lm	1100lm	PUS1-9272515D-WB
						30°	1400lm	1100lm	PUS1-9273015D-WB
						50°	1400lm	850lm	PUS1-9275015D-WB
					3000K	15°	1500lm	1200lm	PUS1-9301515D-WB
						25°	1500lm	1200lm	PUS1-9302515D-WB
						30°	1500lm	1200lm	PUS1-9303015D-WB
						50°	1500lm	900lm	PUS1-9305015D-WB
					4000K	15°	1600lm	1300lm	PUS1-9401515D-WB
						25°	1600lm	1300lm	PUS1-9402515D-WB
						30°	1600lm	1300lm	PUS1-9403015D-WB
						50°	1600lm	1000lm	PUS1-9405015D-WB


18W	21W	36V	500mA	90	2700K	15°	1900lm	1500lm	PUS2-9271521D-WB
						25°	1900lm	1500lm	PUS2-9272521D-WB
						30°	1900lm	1500lm	PUS2-9273021D-WB
						50°	1900lm	1100lm	PUS2-9275021D-WB
					3000K	15°	2000lm	1600lm	PUS2-9301521D-WB
						25°	2000lm	1600lm	PUS2-9302521D-WB
						30°	2000lm	1600lm	PUS2-9303021D-WB
						50°	2000lm	1200lm	PUS2-9305021D-WB
					4000K	15°	2100lm	1700lm	PUS2-9401521D-WB
						25°	2100lm	1700lm	PUS2-9402521D-WB
						30°	2100lm	1700lm	PUS2-9403021D-WB
						50°	2100lm	1300lm	PUS2-9405021D-WB

Code Remark: D=D(DALI Dim)

Coding

PUS1	-	***	**	**	*	-	*	-	*
Model	CRI/ CCT	Beam Angle	Power	Control	Finish	Reflector Color	Accessory		
PUS1	927	15	15	D	W	B	H		
PURE S-15W	CR190/ 2700K	15°	15W	DALI DIM	White	Black	Honeycomb		
PUS2	930	24	21		B				
PURE S-21W	CR190/3000K	24°	21W		Black				
	940	36							
	CR190/ 4000K	36°							
		50							
		50°							


PURE M – LED Tracklight



Quick Info

- CITIZEN LED: 28W, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 18°, 30°, 45°
- Lumen Output: Up to 2900lm System Luminous Flux
- IP Class: IP20
- LED Driver: On-Off

Light Distribution

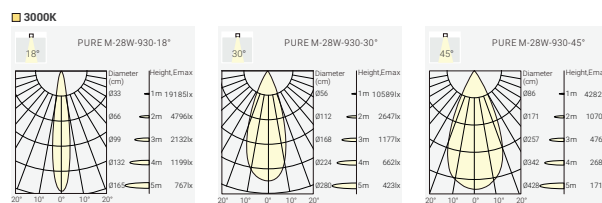

Finish



Order Info (PURE M in White Housing & Black Reflector as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
25W	28W	36V	700mA	90	2700K	18°	3200lm	2500lm	PUM1-9271828F-WB
						30°	3200lm	2500lm	PUM1-9273028F-WB
						45°	3200lm	2500lm	PUM1-9274528F-WB
					3000K	18°	3400lm	2700lm	PUM1-9301828F-WB
						30°	3400lm	2700lm	PUM1-9303028F-WB
						45°	3400lm	2700lm	PUM1-9304528F-WB
					4000K	18°	3600lm	2900lm	PUM1-9401828F-WB
						30°	3600lm	2900lm	PUM1-9403028F-WB
						45°	3600lm	2900lm	PUM1-9404528F-WB

Code Remark: F=F(ON-OFF)

Coding

PUM1	-	***	**	**	*	-	*	-	*
Model	CRI/ CCT	Beam Angle	Power	Control	Finish	Reflector Color	Accessory		
PUM1	927	18°	28	F	W	B	H		
PURE M	CR190/ 2700K	18°	28W	On-Off	White	Black	Honeycomb		
	930	30°			B				
	CR190/3000K	30°			Black				
	940	45°							
	CR190/ 4000K	45°							

Optional accessory



Code for PUM1-9301828F-WB with Honeycomb
PUM1-9301828F-WB-H

Track System



Compatible with GLOBAL / POWERGEAR 3-Circuit Track System


PURE M – LED Tracklight



Quick Info

- CITIZEN LED: 28W, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 18°, 30°, 45°
- Lumen Output: Up to 2900lm System Luminous Flux
- IP Class: IP20
- LED Driver: DALI Dim

Light Distribution

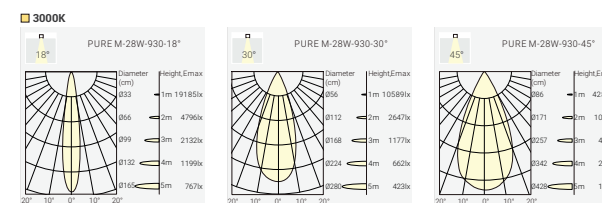

Finish



Order Info

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
25W	28W	36V	700mA	90	2700K	18°	3200lm	2500lm	PUM1-9271828D-WB
						30°	3200lm	2500lm	PUM1-9273028D-WB
						45°	3200lm	2500lm	PUM1-9274528D-WB
					3000K	18°	3400lm	2700lm	PUM1-9301828D-WB
						30°	3400lm	2700lm	PUM1-9303028D-WB
						45°	3400lm	2700lm	PUM1-9304528D-WB
					4000K	18°	3600lm	2900lm	PUM1-9401828D-WB
						30°	3600lm	2900lm	PUM1-9403028D-WB
						45°	3600lm	2900lm	PUM1-9404528D-WB

Code Remark: D=D(DALI Dim)

Optional accessory



Code for PUM1-9301828D-WB with Honeycomb
PUM1-9301828D-WB-H

Track System



Compatible with GLOBAL 3-Circuit Track System

Coding

PUM1	-	***	**	**	*	-	*	-	*
Model	CRI/ CCT	Beam Angle	Power	Control	Finish	Reflector Color	Accessory		
PUM1	927	18°	28	D	W	B	H		
PURE M	CR190/ 2700K	18°	28W	DALI DIM	White	Black	Honeycomb		
	930	30°			B				
	CR190/3000K	30°			Black				
	940	45°							
	CR190/ 4000K	45°							