

MIU

Architectural
Ceiling Light & Pendant Light
Elegant Design, No Visible Screw




Project: Office Borg Forvaltning Trondheim, Norway



Project: Office Borg Forvaltning Trondheim, Norway


MIU-C M – Ceiling Mounted Light

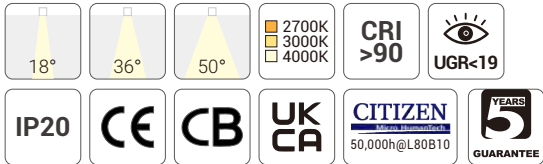

Quick Info

- CITIZEN LED: 15W, 21W, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 15°, 36°, 50°
- Lumen Output: Up to 1900lm System Luminous Flux
- IP Class: IP20
- LED Driver: On-Off, Phase Dim

Light Distribution

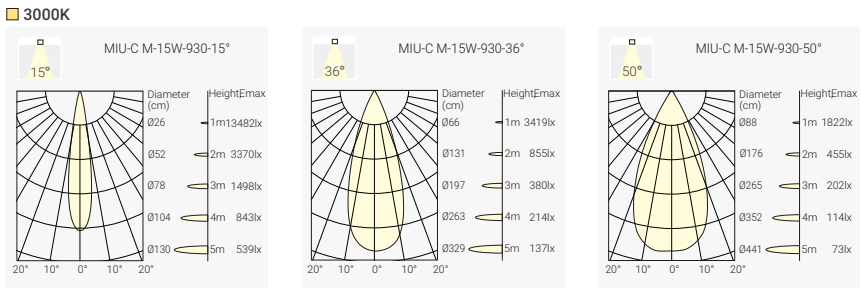

Finish



Order Info (MIU-C M in White Housing & Black Reflector as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
13W	15W	36V	350mA	90	2700K	15°	1400lm	1100lm	MCM1-9271515F-WB
						36°	1400lm	1100lm	MCM1-9273615F-WB
						50°	1400lm	1100lm	MCM1-9275015F-WB
					3000K	15°	1500lm	1200lm	MCM1-9301515F-WB
						36°	1500lm	1250lm	MCM1-9303615F-WB
						50°	1500lm	1200lm	MCM1-9305015F-WB
				4000K	15°	1600lm	1300lm	MCM1-9401515F-WB	
						36°	1600lm	1350lm	
						50°	1600lm	1300lm	
					2700K	15°	1900lm	1600lm	
						36°	1900lm	1700lm	
						50°	1900lm	1600lm	
18W	21W	36V	500mA	90	3000K	15°	2000lm	1700lm	MCM2-9301521F-WB
						36°	2000lm	1800lm	MCM2-9303621F-WB
						50°	2000lm	1700lm	MCM2-9305021F-WB
					4000K	15°	2100lm	1800lm	MCM2-9401521F-WB
						36°	2100lm	1900lm	MCM2-9403621F-WB
						50°	2100lm	1800lm	MCM2-9405021F-WB

Code Remark: F=F(ON-OFF) P=P(Phase Dim) D=D(DALI Dim)

Coding

MCM1	- ***	**	**	*	- *	*	- *
Model	CRI/ CCT	Beam Angle	Power	Control	Finish	Reflector Color	Accessory
MCM1	927	15	15	F	W	W	H
MIU-C M-15W	CRI90/ 2700K	15°	15W	On-Off	White	White	Honeycomb
MCM2	930	36	21	P *	B	B	
MIU-C M-21W	CRI90/ 3000K	36°	21W	Phase Dim	Black	Black	
	940	50		D *		G	
	CRI90/ 4000K	50°		DALI Dim		Gold	

* 21W is not available with Phase Dim, DALI Dim

Reflector Options




Optional accessory



Code for MCM1-9301515F-WB with Honeycomb
MCM1-9301515F-WB-H


MIU-C L – Ceiling Mounted Light

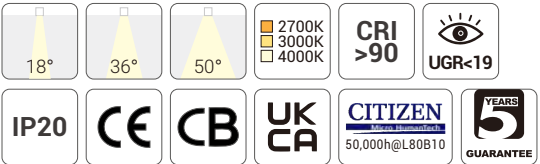

Quick Info

- CITIZEN LED: 28W, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 18°, 36°, 50°
- Lumen Output: Up to 2900lm System Luminous Flux
- IP Class: IP20
- LED Driver: On-Off, DALI Dim

Light Distribution

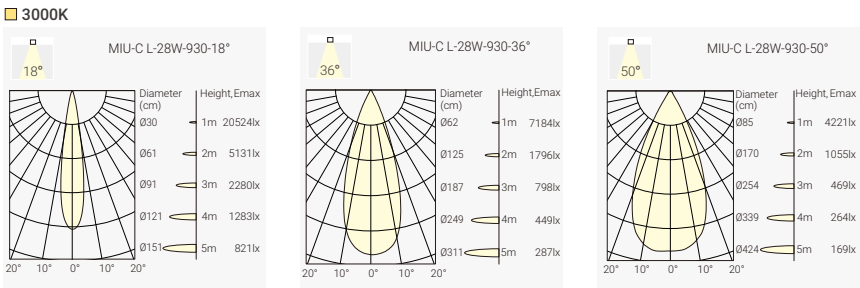

Finish



Order Info (MIU-C L in White Housing & Black Reflector as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
25W	28W	36V	700mA	90	2700K	18°	3200lm	2500lm	MCL1-9271828F-WB
						36°	3200lm	2500lm	MCL1-9273628F-WB
						50°	3200lm	2500lm	MCL1-9275028F-WB
					3000K	18°	3400lm	2700lm	MCL1-9301828F-WB
						36°	3400lm	2700lm	MCL1-9303628F-WB
						50°	3400lm	2700lm	MCL1-9305028F-WB
				4000K	18°	3600lm	2900lm	MCL1-9401828F-WB	
						36°	3600lm	2900lm	
						50°	3600lm	2900lm	
					2700K	18°	3200lm	2500lm	
						36°	3200lm	2500lm	
						50°	3200lm	2500lm	

Code Remark: F=F(ON-OFF) D=D(DALI Dim)

Reflector Options



Optional accessory




Code for MCL1-9301828F-WB with Honeycomb
MCL1-9301828F-WB-H

Coding

MCL1	- ***	**	**	*	- *	*	- *
Model	CRI/ CCT	Beam Angle	Power	Control	Finish	Reflector Color	Accessory
MCM1	927	18	28	F	W	W	H
MIU-C L	CRI90/ 2700K	18°	28W	On-Off	White	White	Honeycomb
	930	36		D	B	B	
	CRI90/ 3000K	36°		DALI Dim	Black	Black	
	940	50				G	
	CRI90/ 4000K	50°				Gold	


MIU-P S – Pendant Light

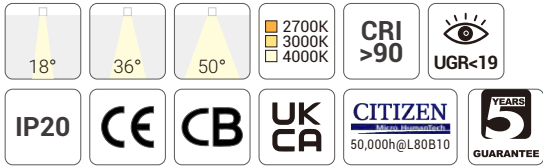

Quick Info

- CITIZEN LED: 11W, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 18°, 36°, 50°
- Lumen Output: Up to 880lm System Luminous Flux
- IP Class: IP20
- LED Driver: On-Off, Phase Dim, DALI Dim

Light Distribution

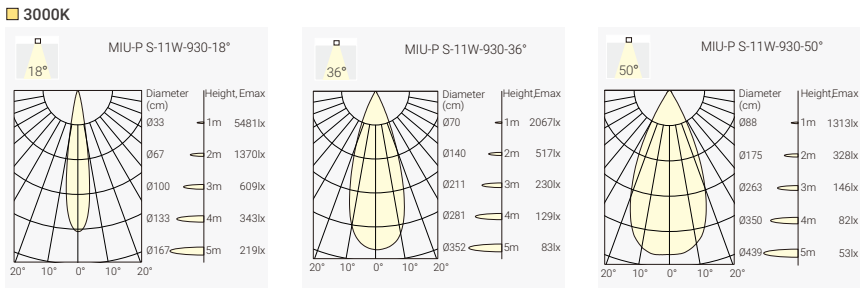

Finish



Order Info (MIU-P S in White Housing & Black Reflector as an Example)


LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
9W	11W	36V	250mA	90	2700K	18°	900lm	750lm	MPS1-9271811F-WB
						36°	900lm	750lm	MPS1-9273611F-WB
						50°	900lm	750lm	MPS1-9275011F-WB
					3000K	18°	1000lm	800lm	MPS1-9301811F-WB
						36°	1000lm	800lm	MPS1-9303611F-WB
						50°	1000lm	800lm	MPS1-9305011F-WB
					4000K	18°	1100lm	880lm	MPS1-9401811F-WB
						36°	1100lm	880lm	MPS1-9403611F-WB
						50°	1100lm	880lm	MPS1-9405011F-WB

Code Remark: F=F(ON-OFF) P=P(Phase Dim) D=D(DALI Dim)


Coding

MPS1	- ***	**	**	*	- *	*	- *
Model	CRI/ CCT	Beam Angle	Power	Control	Finish	Reflector Color	Accessory
MPS1	927	15°	11	F	W	W	H
MIU-P S-11W	CRI90/ 2700K	15°	11W	On-Off	White	White	Honeycomb
	930	36°		P	B	B	
	CRI90/ 3000K	36°		Phase Dim	Black	Black	
	940	50°		D		G	
	CRI90/ 4000K	50°		DALI Dim		Gold	


Reflector Options



Optional accessory




MIU-P M – Pendant Light

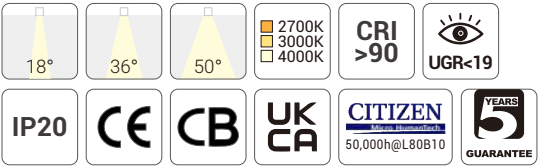

Quick Info

- CITIZEN LED: 15W, 21W, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 15°, 36°, 50°
- Lumen Output: Up to 1900lm System Luminous Flux
- IP Class: IP20
- LED Driver: On-Off, Phase Dim

Light Distribution

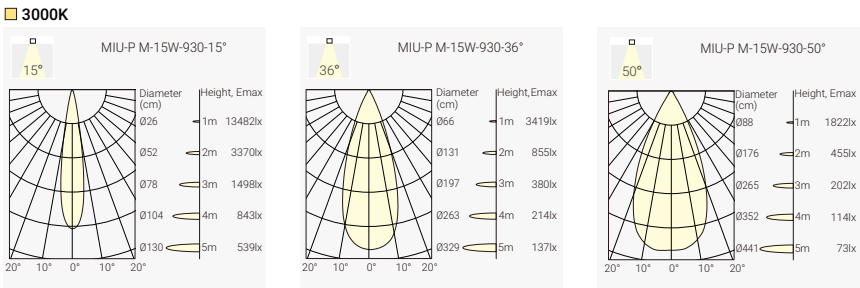

Finish




Order Info (MIU-P M in White Housing & Black Reflector as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
13W	15W	36V	350mA	90	2700K	15°	1400lm	1100lm	MPM1-9271515F-WB
						36°	1400lm	1100lm	MPM1-9273615F-WB
						50°	1400lm	1100lm	MPM1-9275015F-WB
					3000K	15°	1500lm	1200lm	MPM1-9301515F-WB
						36°	1500lm	1250lm	MPM1-9303615F-WB
						50°	1500lm	1200lm	MPM1-9305015F-WB
					4000K	15°	1600lm	1300lm	MPM1-9401515F-WB
						36°	1600lm	1350lm	MPM1-9403615F-WB
						50°	1600lm	1300lm	MPM1-9405015F-WB


18W	21W	36V	500mA	90	2700K	15°	1900lm	1600lm	MPM2-9271521F-WB
						36°	1900lm	1700lm	MPM2-9273621F-WB
						50°	1900lm	1600lm	MPM2-9275021F-WB
					3000K	15°	2000lm	1700lm	MPM2-9301521F-WB
						36°	2000lm	1800lm	MPM2-9303621F-WB
						50°	2000lm	1700lm	MPM2-9305021F-WB
					4000K	15°	2100lm	1800lm	MPM2-9401521F-WB
						36°	2100lm	1900lm	MPM2-9403621F-WB
						50°	2100lm	1800lm	MPM2-9405021F-WB

Code Remark: F=F(ON-OFF) P=P(Phase Dim) D=D(DALI Dim)

Reflector Options



Optional accessory




Coding

MPM1	- ***	**	**	*	- *	*	- *
Model	CRI/ CCT	Beam Angle	Power	Control	Finish	Reflector Color	Accessory
MPM1	927	15°	15	F	W	W	H
MIU-P M-15W	CRI90/ 2700K	15°	15W	On-Off	White	White	Honeycomb
	930	36°	21	P*	B	B	
	CRI90/ 3000K	36°	21W	Phase Dim	Black	Black	
	940	50°		D*		G	
	CRI90/ 4000K	50°		DALI Dim		Gold	

* 21W is not available with Phase Dim, DALI Dim


MIU -P L – Pendant Light

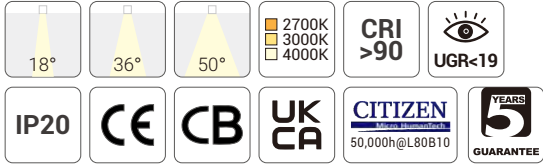

Quick Info

- CITIZEN LED: 28W, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 18°, 36°, 50°
- Lumen Output: Up to 2900lm System Luminous Flux
- IP Class: IP20
- LED Driver: On-Off, DALI Dim

Light Distribution

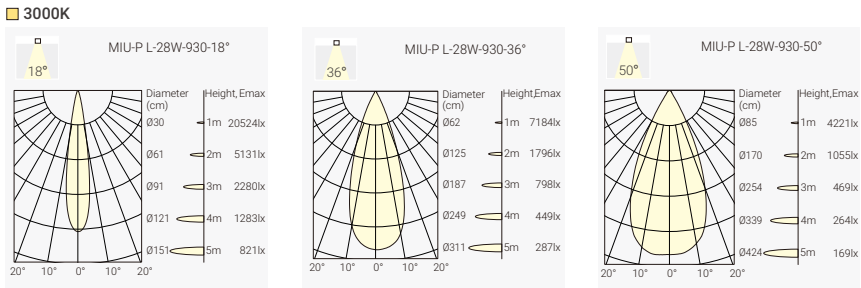

Finish



Order Info (MIU-P L in White Housing & Black Reflector as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
25W	28W	36V	700mA	90	2700K	18°	3200lm	2500lm	MPL1-9271828F-WB
						36°	3200lm	2500lm	MPL1-9273628F-WB
						50°	3200lm	2500lm	MPL1-9275028F-WB
					3000K	18°	3400lm	2700lm	MPL1-9301828F-WB
						36°	3400lm	2700lm	MPL1-9303628F-WB
						50°	3400lm	2700lm	MPL1-9305028F-WB
					4000K	18°	3600lm	2900lm	MPL1-9401828F-WB
						36°	3600lm	2900lm	MPL1-9403628F-WB
						50°	3600lm	2900lm	MPL1-9405028F-WB

Code Remark: F=F(ON-OFF) D=D(DALI Dim)


Reflector Options



Coding

MPL1	-	***	**	**	*	-	*	*	-	*
Model	CRI/ CCT	Beam Angle	Power	Control	Finish	Reflector Color	Accessory			
MPL1	927	15	28	F	W	W	H			
MIU-P L-28W	CRI90/ 2700K	15°	28W	On-Off	White	White	Honeycomb			
	930	36		D	B	B				
	CRI90/ 3000K	36°		DALI Dim	Black	Black				
	940	50				G				
	CRI90/ 4000K	50°				Gold				

Optional accessory



Code for MPL1-9301828F-WB with Honeycomb
MPL1-9301828F-WB-H

