

# SPACE 16 RING

Upward and Downward in One Elegant Form

Stepless Height and Tilt Up to 1700mm

Refined Electroplated Metallic Finish Options

Elegant Design, Functional Lighting Solution


UGR<19, Glare-Free with Visual Comfort




Stepless Height and Tilt Adjustment  
Up to 1700mm via Lifter



Uplight - Soft Ambient Glow  
Beam Angle: 110°


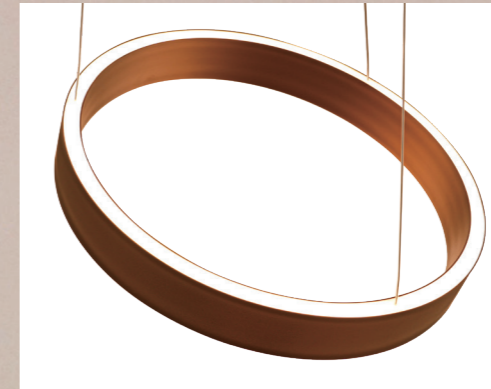


Downlight - Precision Accent Lighting  
Beam Angle: 36°

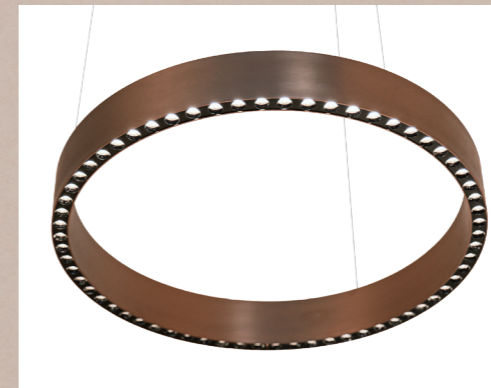

# SPACE 16 RING – Decorative Pendant Light



New

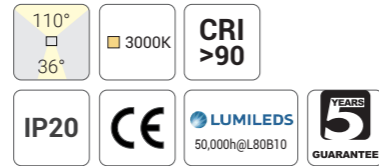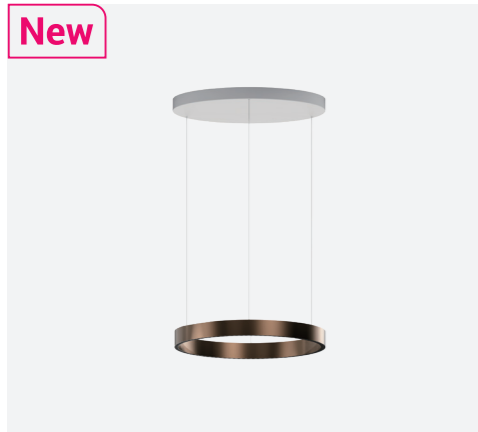


### Quick Info

- General Lighting, Pendant Direct & Indirect
- Lumileds LED: 28W, 43W, CRI>90
- CCT: 3000K Available as Standard
- Beam Angle: 36° ↓, 110° ↑
- Lumen Output: Up to 2700lm System Luminous Flux
- LED Driver: On-Off, Phase Dim, DALI Dim

### Light Distribution

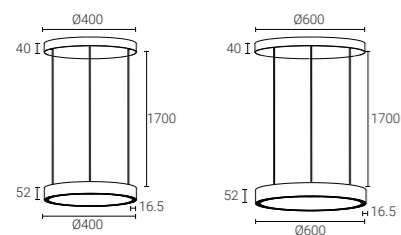

### Finish

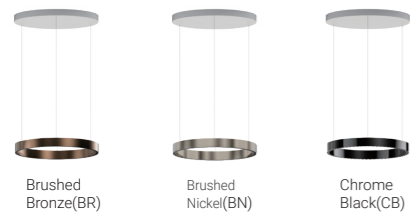

### Order Info

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	System Output	Code
28W	30W	36V	800mA	90	3000K	36° ↓ 110° ↑	1900lm	S16A-9303630F-BR-U S16A-9303630F-BN-U S16A-9303630F-CB-U S16A-9303630P-BR-U S16A-9303630P-BN-U S16A-9303630P-CB-U S16A-9303630D-BR-U S16A-9303630D-BN-U S16A-9303630D-CB-U
43W	46W	36V	1200mA	90	3000K	36° ↓ 110° ↑	2700lm	S16C-9303646F-BR-U S16C-9303646F-BN-U S16C-9303646F-CB-U S16C-9303646P-BR-U S16C-9303646P-BN-U S16C-9303646P-CB-U S16C-9303646D-BR-U S16C-9303646D-BN-U S16C-9303646D-CB-U

Code Remark: F=F(ON-OFF) P=P(Phase Dim) D=D(DALI Dim)

### Coding

Model	CRI/ CCT	Beam Angle	Power	Control	Finish	Accessory
<b>S16A</b> SPACE 16 Ring-400-30W	<b>930</b> CRI90/ 3000K	<b>36</b> 36° ↓	<b>30</b> 30W	<b>F</b> On-Off	<b>BR</b> Brushed Bronze	<b>U</b> Uplight
<b>S16C</b> SPACE 16 Ring-600-46W		<b>36</b> 36° ↓ 110° ↑	<b>46</b> 46W	<b>P</b> Phase Dim <b>D</b> DALI Dim	<b>BN</b> Brushed Nickel <b>CB</b> Chrome Black	

Project: Application reference



Simply Lift or Pull Down the Luminaire to Achieve Your Desired Height

